

# Competitive System Resource Impact Testing

CylancePROTECT<sup>®</sup> Goes Head-To-Head  
with Signature-Based Antivirus Solutions



CYLANCE

Security administrators struggle to balance the mandate of providing adequate security against malware threats with the needs of end-users to work in an unfettered manner. One of the side effects is the administrative overhead burden on the central processing unit on the endpoint. Should these administrative tasks monopolize the processing power, administrators risk having end-users simply deactivate the protection in order to carry on with their work routine. Further, simple, elegant solutions are preferred to preserve the integrity of the data. “Complexity is the enemy of security,” notes professor Alan Woodward from the U.K.’s University of Surrey in a recent blog post on the challenges of signature-based antivirus. But, even if the protection is not deactivated, the average toll on worker productivity can exceed **\$1,000 per employee per year**.



This paper is oriented toward security administrators whose daily tasks include endpoint security administration and their leadership who balance organizational objectives and budgetary constraints.

Forward-thinking security administrators target minimal intrusiveness on work activity by security measures, and nominally, that can vary from 5-10% of CPU utilization. Above that, productivity suffers, and help desk calls, end-user deactivation, and general dissatisfaction often ensue.

Cylance® conducted several tests to determine the impact on a computer system and the user’s ability to perform several common actions, such as copying or creating files, and their impact while detecting and quarantining malware.

## Methodology

### Systems

There were three types of systems utilized during this testing to simulate a range of performance and capabilities. A low-end laptop with an older, slower processor and a spinning hard drive, a mid-range laptop with relatively modern i7 quad-core CPU and SSD, and a higher-end desktop with a current i7 quad-core CPU and high-speed M.2 NVMe SSD storage.

### Systems Used

#### Low-end — Laptop:

- Toshiba Satellite C55
- Intel Celeron N2820 @ 2.13GHz (2 cores)
- 8GB RAM
- Toshiba MQ01ABF050 500GB 5400RPM
- Windows 10 Enterprise

#### Medium-end — Laptop:

- Dell Latitude E7450
- Intel Core i7-5600U 2.60GHz (4 cores)
- 16GB RAM
- Samsung PM851 M.2 PCIe 256GB SSD
- Windows 7 SP1

#### Higher-end — Desktop:

- Intel Skull Canyon NUC6i7KYK
- Intel Core i7-6770HQ 2.60GHz (4 cores w/hyperthreading – 8 logical cores)
- 32GB RAM
- Samsung 960 PRO M.2 PCIe NVMe 1TB SSD
- Windows 10 Enterprise

All systems were put in High-Performance power settings and all sleep/idle functions were set to ‘Never’.

## Software Tested

In this test, three software packages were tested — two market share leaders, which we will call Brand X and Brand Y, and CylancePROTECT.

The testing methodology sought to provide equivalent protection levels across the three tested products. An astute reader might conclude that management and administrative costs would likely increase as layered protection proliferates.

## Software Policies

All of the tests were run three times on each system and the results of the three runs were averaged to determine a test average on that specific system.

CylancePROTECT policy was configured as:

- **File Actions** — Auto-quarantine — no exclusions
- **Memory Protection** — Enabled and all settings set to Terminate — no exclusions
- **Protection Settings** — Prevent shutdown, kill unsafe running processes, and watch for new files — no exclusions enabled, with background threat detection disabled
- **Application Control** — OFF
- **Agent Settings** — Desktop notifications enabled
- **Script Control** — OFF
- **Device Control** — All devices enabled with full access — no exclusions


## Test Scenarios

There were several testing scenarios designed to measure system and user impact.

### Resource Consumption Test

1. Designed to determine what system resources were being utilized by the installed product after installation but sitting idle.

- RAM usage is determined by adding the in-use RAM utilized by new processes/services added to the system during the install.
- Disk usage is determined by measuring the primary hard drive Used Space in bytes – from drive properties; before the installation then after the installation and all updates have been applied.

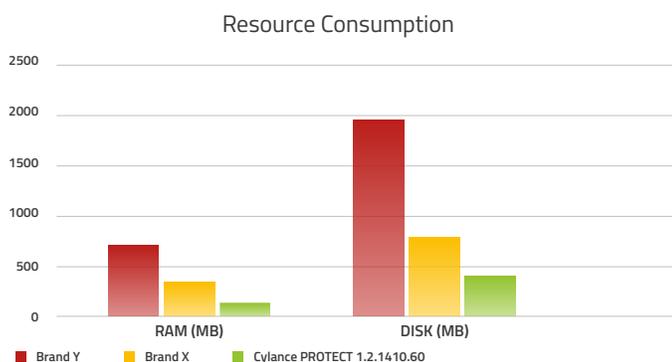

### Benign Files

1. Benign File Creation – 500


- This test is designed to judge any system impact by the security software on creating new files on the disk. A simple FOR loop that copies the Windows Media Player setup file (setup\_wm.exe) 500 times renaming the copied file to setup\_wm###.exe. A simple timing batch script was used to time the creation of these files.

2. Benign File Creation – 1,000

- This test is designed to judge any system impact by the security software on creating new files on the disk. A simple FOR loop that copies the Windows Media Player setup file (setup\_wm.exe) 1,000 times renaming the copied file to setup\_wm###.exe. A simple timing batch script was used to time the creation of these files.

3. Benign File Copy – MPRESS packed 500

- This test is designed to judge any system impact by the security software when copying 500 files from an external USB 3 hard drive. This test utilized 500 copies of the Windows Media Player setup file (setup\_wm.exe) that were all packed with a common packer – MPRESS.

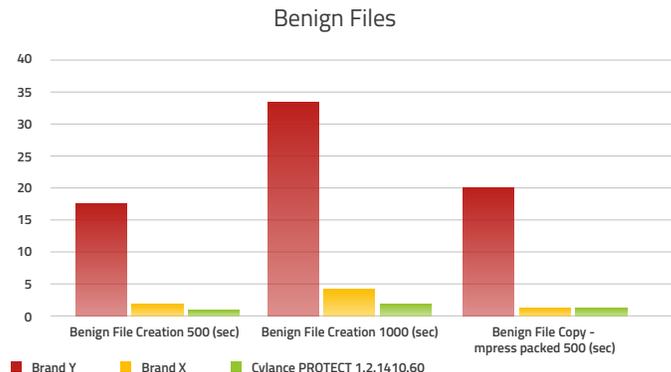


### Malware Detection and Cleaning

1. Malware Samples Copy 300

- This test is designed to judge any system impact by the security software when copying 300 samples of malware from a network share. This test utilized 300 samples of malware consisting of 100 random ransomware samples, 100 random malware samples greater than 3MB in size, and 100 ransomware samples that have been packed.

2. Detect and Clean 300

- This test is designed to judge system impact during the detection and cleaning of the 300 samples copied to the system from the previous test. Time to detect and clean was determined by starting the PERFMON data monitor at the start of the file copy process and was stopped when the security software had stopped scanning the files and CPU load returned to approximately 0%.

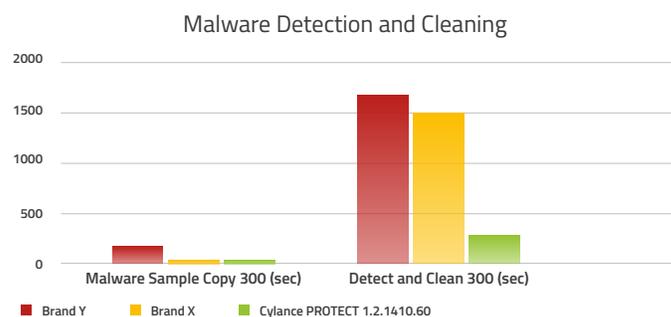

3. CPU Impact

- CPU average and max load were determined by creating a PERFMON data set to gather CPU load (in percentage) while the installed security software detected and cleaned the 300 samples of malware.

## The biggest performance differences are in detection and cleaning.

The biggest differences in the impact on the end-user system was seen when copying 300 malware samples to the hosts.

As Brand Y injected itself in the copy process, it began detecting malware as soon as the file copy started. While it was the fastest at detecting and cleaning some of the 300 samples, taking only 203 seconds, the CPUs were essentially totally consumed during this process. The average CPU load during the 300-file copy was over 79% and maxed out at 100%. It should also be noted that Brand Y only had to perform cleaning on 2/3 of the files – as they missed detecting 99 of the 300 samples. Compared to CylancePROTECT, Brand Y was 20% quicker in detecting and cleaning 67% of the samples, however Brand Y's average CPU utilization during this time was nearly 20 times that of CylancePROTECT doing the same task.

Brand X's results were significantly different than Brand Y's. As Brand X does not inject itself into the file copy, the actual copying of the files happens very quickly. However, once their deferred scanning begins, their CPU consumption dramatically increases to an average of 33.6% of the CPU (maxing out at 100%), and it took them nearly 1,500 seconds to detect and clean 94.3% of the 300 samples. Compared to CylancePROTECT, Brand X used over eight times the CPU and took nearly six times longer to detect and clean the samples.

CylancePROTECT utilized, on average, only 4% of the CPU, which maxed at 23.4%, and took 277 seconds to detect and quarantine 99.7% of the samples. There was one file remaining out of the 300. This file was a corrupt file — not a valid WIN32 application when it was executed.

## Other Observations During the Test

These are other observations seen during the test.


### Brand Y

- The update process upon initial install took over an hour to complete, even when downloading the updates from a locally connected management console software repository.
- Upon reboot, the on-access scanning process consumes significant CPU resources while loading data. On the low-end laptop, hard disk access was significant for many minutes after log in.

### Brand X

- The update process downloaded 15 separate updates and took about 10 minutes to complete.
- Upon installation, Brand X *required* a reboot.
- The Brand X Agent downloaded an update that *required* a reboot to take affect several times during malware sample testing.

CPU Usage

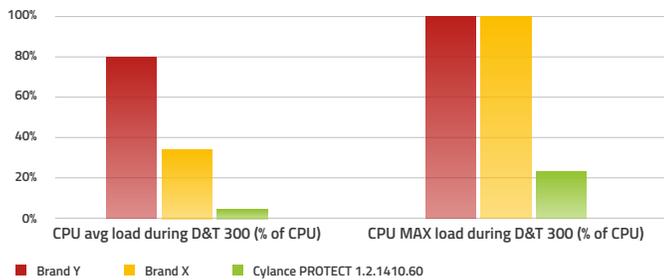

## Test Results

### Brand Y and Brand X have entirely different approaches to scanning and detecting malware.

Brand Y uses a driver to inject itself into all read/write functions whether on a local disk, removable storage, or network drive. Brand Y calls this feature on-access protection and is enabled by default. Many AV vendors commonly use this method and it is a major driver in users complaining that the AV is making their box crawl to a halt. When performing common tasks, such as unzipping large archives, or copying many files, this type of system severely impacts performance. As you can see from the results, in most cases Brand Y's scanning during these file creation and copy events, on average, took 16 times longer than on a CylancePROTECT system.

Brand X however, uses a method called Deferred Scanning. This is similar to what CylancePROTECT does with the File Watcher feature — keeps track of files written to disk and then queues them up for scanning at a later time. This results in little immediate user interruption, as you can see from the results where Brand X and CylancePROTECT were pretty much equal in the file creation/copy tests.

### Brand X and Brand Y use significantly more system resources (at idle) than CylancePROTECT.

Both Brand X and Brand Y use significantly more resources on a host than does CylancePROTECT. CylancePROTECT sits idle at about 107MB of RAM and about 380MB of hard disk space consumed with two running processes.

Sitting idle, Brand Y consumes over six times the RAM used and over five times the disk space (nearly 2GB) consumed by the installed applications and updates. Brand Y also has 13 processes running.

Brand X's latest version has a much lower RAM and process usage than previous versions. However, even while sitting idle, Brand X still uses over twice the memory and twice the disk space of CylancePROTECT.

## Conclusion

Even if one minute a day is lost to productivity drains because of PC horsepower allocation to security scans and remediation, the cost over a year across a medium-sized enterprise adds up quickly. [A 10,000 employee operation would face over \\$10M in direct productivity losses alone.](#) As an early trigger for expensive PC hardware refresh is an onslaught of help desk calls, many companies find that they can actually extend the hardware refresh cycle out another 12–24 months simply by employing a security solution that does not tax the PC as heavily. The indirect costs associated with brand reputation and opportunity losses add untold thousands of dollars per year as well. Further, some institutions under green initiatives monitor power consumption related to security measures favor solutions that use less energy. As such, forward-thinking enterprises are looking beyond the software license fees when evaluating security software alternatives.

The following table represent the raw results from the test:

| Brand Y                              | Data     | CylancePROTECT,<br>1.2.1480 — Data | Ratio X Times Cylance |
|--------------------------------------|----------|------------------------------------|-----------------------|
| RAM                                  | 689MB    | <b>107MB</b>                       | <b>6.4</b>            |
| DISK                                 | 1,932MB  | <b>381MB</b>                       | <b>5.0</b>            |
| Benign File Creation 500             | 17.49sec | <b>1.02sec</b>                     | <b>17.1</b>           |
| Benign File Creation 1,000           | 33.82sec | <b>1.98sec</b>                     | <b>17.1</b>           |
| Benign File Copy - mpress Packed 500 | 20.13sec | <b>1.28sec</b>                     | <b>15.7</b>           |
| Malware Samples Copy 300             | 203sec   | <b>28.3sec</b>                     | <b>7.2</b>            |
| Detect and Clean 300                 | 203.0sec | <b>277.0sec</b>                    | <b>0.8</b>            |
| CPU Avg. Load During D&T 300         | 79%      | <b>4.0%</b>                        | <b>19.9</b>           |
| CPU MAX Load During D&T 300          | 100%     | <b>23.4%</b>                       | <b>4.3</b>            |
| Brand X                              | Data     | CylancePROTECT,<br>1.2.1480 — Data | Ratio X Times Cylance |
| RAM                                  | 269MB    | <b>107MB</b>                       | <b>2.51</b>           |
| DISK                                 | 785MB    | <b>381MB</b>                       | <b>2.0</b>            |
| Benign File Creation 500             | 2.02sec  | <b>1.02sec</b>                     | <b>2.0</b>            |
| Benign File Creation 1,000           | 3.98sec  | <b>1.98sec</b>                     | <b>2.0</b>            |
| Benign File Copy - mpress Packed 500 | 1.76sec  | <b>1.28sec</b>                     | <b>1.4</b>            |
| Malware Samples Copy 300             | 29.2sec  | <b>28.3sec</b>                     | <b>1.0</b>            |
| Detect and Clean 300                 | 1,496sec | <b>277.0sec</b>                    | <b>5.7</b>            |
| CPU Avg. Load During D&T 300         | 33.6%    | <b>4.0%</b>                        | <b>8.4</b>            |
| CPU MAX Load During D&T 300          | 100.0%   | <b>23.4%</b>                       | <b>4.3</b>            |

If you're using a bloated antivirus program, you're likely losing over **\$1,000 a year per employee!**



The average worker works **5 days** a week, **50 weeks** a year.

**5 days**  
x **50 weeks**  
-----  
**250 days**



Let's assume the average knowledge worker loses **10 minutes** a day.

**10 minutes**  
x **250 days**  
-----  
**2,500 mins. / 42.67 hours**



The average American worker earns **\$26.00** an hour.

**\$26.00**  
x **42.67 hours**  
-----  
**\$1,109.42**

Source: <https://www.bls.gov/news.release/empsit.t19.htm>

+1-844-CYLANCE  
sales@cylance.com  
www.cylance.com  
400 Spectrum Center Drive, Irvine, CA 92618

